


TEAFLEX



- Locking device system provides a quick and secure push-in connection of corrugated conduits
- High-grade formulated polyamide
- Self-extinguishing, free from halogens and cadmium
- Excellent impact strength
- Temperature range: -40°C(-40°F) to 105°C(221°F)
- Short-term to 160°C(320°F)
- Up to IP68 / NEMA 6P protection with the reinforced sealing cap at conduit side
- Colour: Black standard, other colours available upon request

IP RATING	SHAPE	NW2
<b>K8-S-T-101010</b>		
COLOUR MATERIAL	SÉRIES TYPE	NW1 NW3

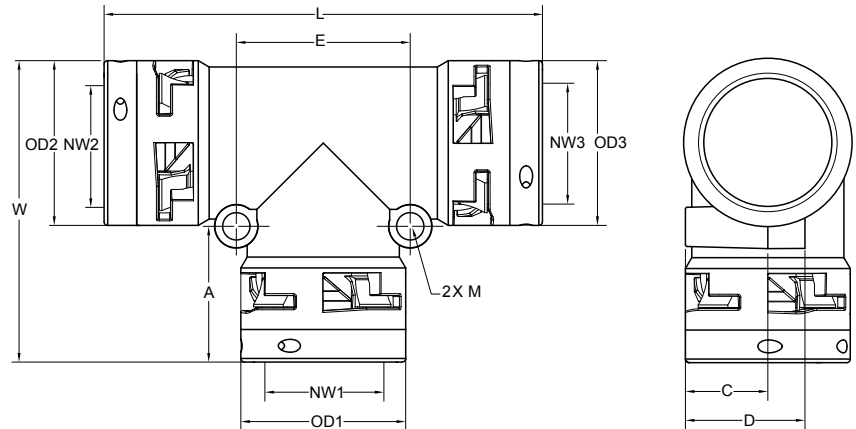

Specifications are subject to change without notice

Order No.	Order No.	Fits to Conduit	A		C		D		E		W		L		M	OD1 / OD2 / OD3	
IP66	IP68	NW1-NW2-NW3	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	mm	in
K6-S-T-101010	K8-S-T-101010	10 - 10 - 10	24.5	0.96	10.0	0.39	16	0.63	21.0	0.83	44.9	1.77	69.8	2.75	4	20.0	0.79
K6-S-T-121212	K8-S-T-121212	12 - 12 - 12	27.0	1.06	12.0	0.47	18	0.71	26.0	1.02	51.7	2.03	79.3	3.12	4	24.0	0.94
K6-S-T-171717	K8-S-T-171717	17 - 17 - 17	28.0	1.10	15.0	0.59	22	0.87	32.0	1.26	58.4	2.30	86.7	3.41	5	30.0	1.18
K6-S-T-232323	K8-S-T-232323	23 - 23 - 23	36.0	1.42	19.0	0.75	26	1.02	40.0	1.57	75.0	3.97	112.0	4.41	6	38.0	1.50
K6-S-T-292929	K8-S-T-292929	29 - 29 - 29	37.5	1.48	22.8	0.90	33	1.30	48.0	1.89	83.3	3.28	121.0	4.76	6	45.5	1.79
K6-S-T-363636	K8-S-T-363636	36 - 36 - 36	44.5	1.75	28.5	1.12	38	1.50	58.0	2.28	100.8	3.97	144.5	5.69	6	57.0	2.24
K6-S-T-484848	K8-S-T-484848	48 - 48 - 48	52.0	2.05	34.0	1.34	47	1.85	70.0	2.76	118.8	4.68	169.5	6.67	6	68.0	2.68